

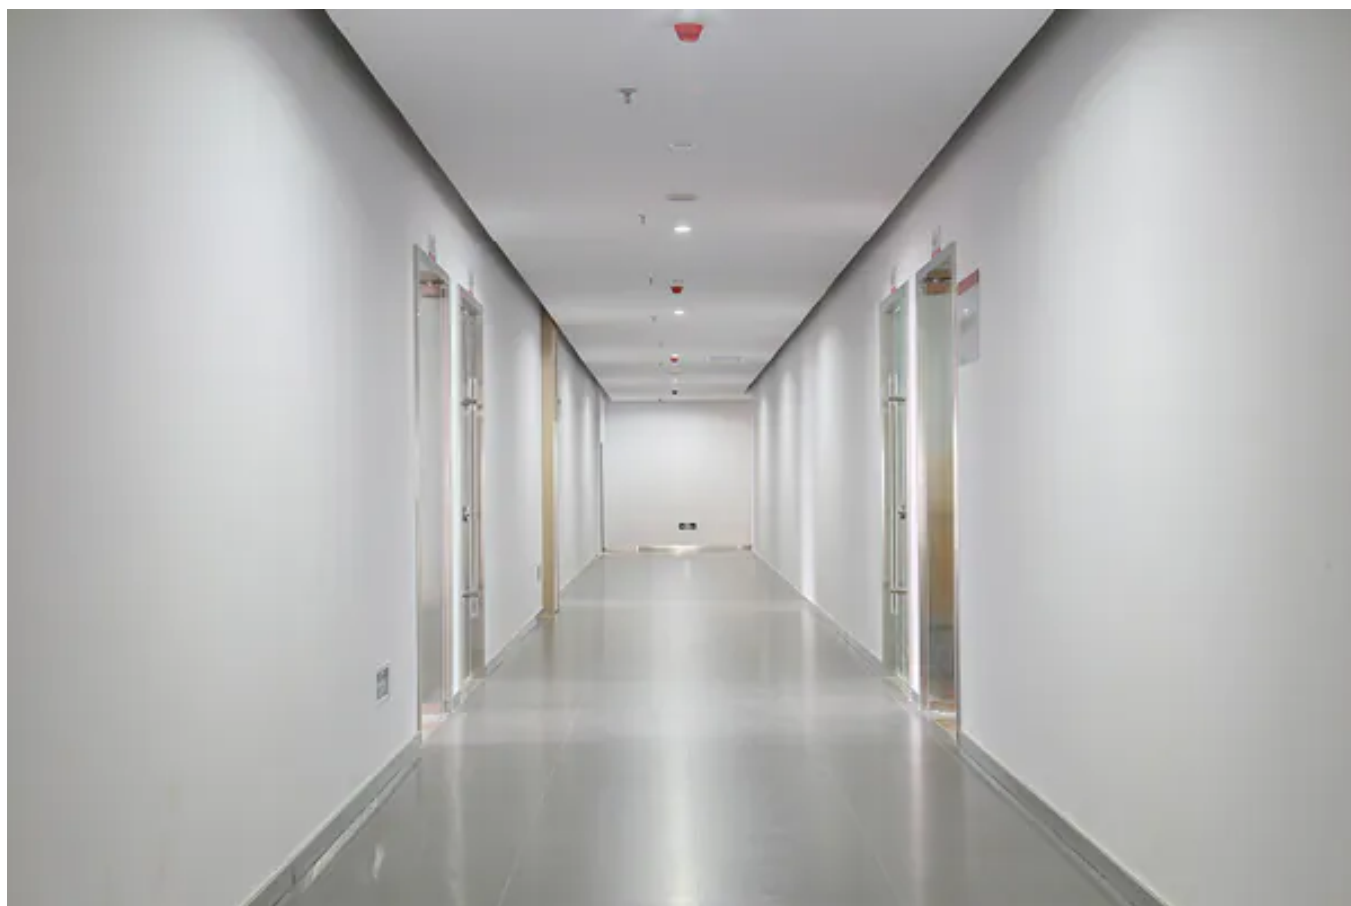
INTERIOR WALL FINISHES / WIPE-CLEAN PVC CLADDING

COVERWALL

PVC wall cladding

Clean surfaces.

Considered details. Lasting practicality.



Rigid PVC wall cladding for interiors where appearance, cleaning and everyday durability matter. A coordinated system of sheets, trims and finishing accessories supplied by Coverad.

Wipe-clean finish

Practical care of surfaces.

System approach

Sheets, joints and corners.

Project support

Take-off and quotation advice.

DESIGNED FOR WORKING INTERIORS

A practical finish for busy spaces.

Specify the surface around the setting, cleaning regime and installation details.

**THE SHEET SYSTEM**

Rigid PVC

Installed with adhesive and finished with trims and/or sealant to create a smooth, professionally detailed surface.

01

Healthcare and education

Wall finishes for support spaces and hard-working interiors. Agree suitability and cleaning procedures for the setting.

02

Washrooms and changing

A practical surface choice for wet-use areas. Detail joints, edges and penetrations for the actual exposure.

03

Corridors and public areas

A neat appearance with practical day-to-day cleaning. Confirm the selected grade for expected wear.

04

Kitchens and service spaces

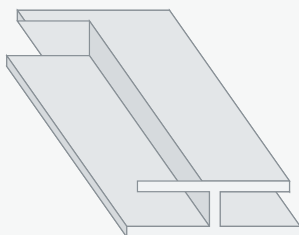
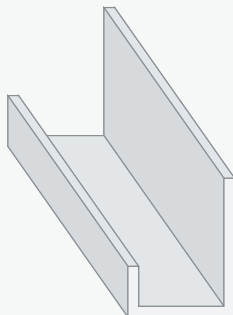
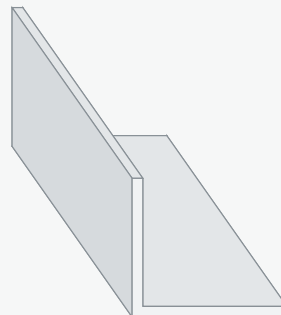
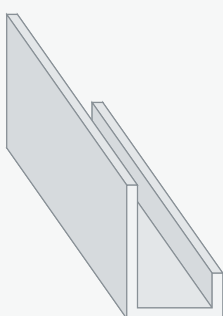
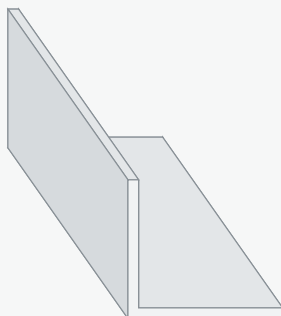
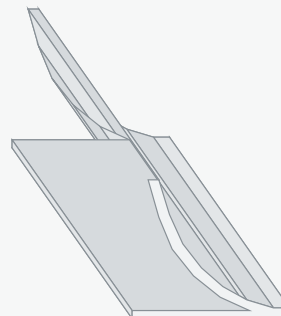
Easy-care walls for utility rooms and back-of-house areas. Confirm compatibility with cleaning chemicals.

Illustrative application images. Agree the wall finish, installation details and cleaning regime for each project.

ACCESSORIES AND PROFILES

The detail completes the system.

Coordinate joints, exposed edges and corners alongside the cladding sheets.

01**02****03****04****05****06****01 / H profile**

Sheet-to-sheet joints on the same plane.

02 / J profile

Exposed edges and perimeter terminations.

03 / External angle

Outside corners and vulnerable edges.

04 / F profile

Junctions with another surface or return.

05 / Internal angle

Internal wall junctions.

06 / Internal corner / coved

A smoother internal corner transition.

Profiles are reference illustrations, not scaled section drawings. Confirm trim size, sheet compatibility, colour and availability for the selected package.

FOR ARCHITECTS AND SPECIFIERS

Technical specification

Confirm the selected sheet, finish and complete installation system.

Product	Coverwall PVC Wall Cladding
Material	Rigid PVC wall cladding sheet
Sheet width	1220 mm
Sheet lengths	2440 mm and 3050 mm
Thickness options	2.3 mm or 2.5 mm
Finish / colour	Select from the available Coverad range
Installation	Adhesive with trims and/or sealant
Profiles	H, J, F, internal/external angles and corner detail
Intended use	Healthcare, education, washrooms and working interiors

Fire performance and care

Coverwall sheet fire classification: EN 13501-1 B-s3,d0; UL 94 V-0. Applicable to the 2.3 mm and 2.5 mm sheets across the available colours, as confirmed by Coverad.

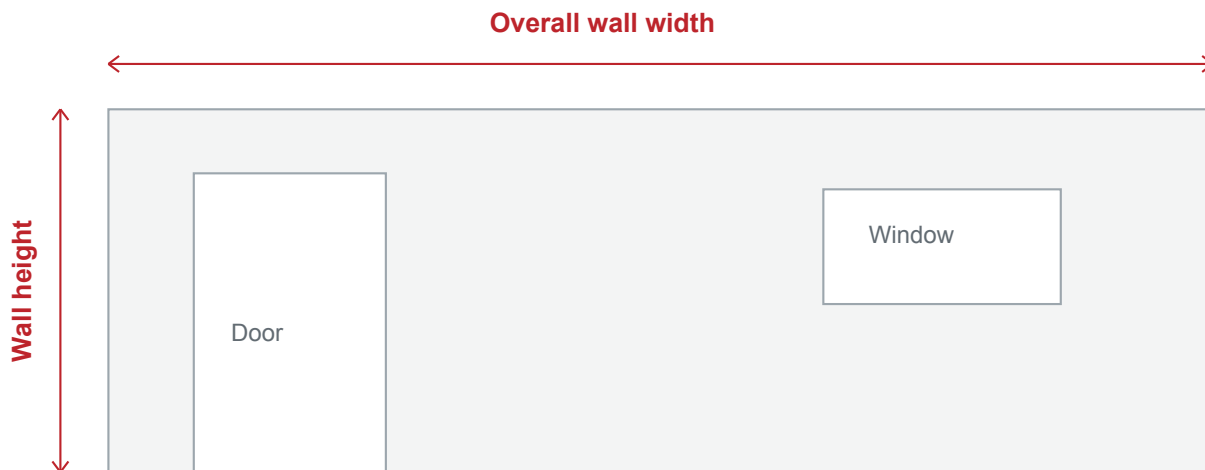
The supplied manufacturer data sheet records B-s3,d0 at 1.9–2.5 mm and V-0 at 1.7–3 mm for Trovidur EC Clad white. Confirm suitability of the complete installed system, including adhesive, trims and substrate; check cleaning-product compatibility.

Material evidence: Röchling technical data sheet 591164, version 1.0, 10 October 2024.

MEASURING AND NEXT STEPS

Plan the complete wall finish.

Record the walls and junctions, then confirm the sheet and accessory package.

01 / RECORD THE WALLS

Illustrative wall elevation, not to scale. Record each wall separately, including opening sizes and positions, corners, returns, sockets and other penetrations.

02**Coordinate the layout**

Agree sheet orientation and joints around openings. Confirm substrate condition, adhesive suitability and any movement allowances.

03**Include every finishing detail**

List internal/external corners, perimeter edges and junctions. Confirm compatible trims, sealant and accessories; allow cutting and waste to the project layout.

Sheets, trims and accessories. One enquiry.

Send Coverad your wall dimensions, drawings and finish requirements for sheet take-off, trim advice and quotation support.

01276 819006sales@coverad.co.ukcoverad.co.uk